



ROADWAY CRITERIA

- MORRIS BRIDGE ROAD = 45MPH
- ROADWAY WIDTH = 44 FEET (INCLUDES 2 - 4 FT. BIKE LANES)
- UNSIGNALIZED - MORRIS BRIDGE ROAD / COREY LAKE BOULEVARD
- TURN BAY = 250' MIN. (LENGTH INCLUDED WITH TAPER) + 100' (STORAGE)

LEGEND
+ - GRIND OUT MARKING

- OPTION 1
- GRINDING OUT EXISTING PAVEMENT MARKINGS
GRINDING WILL LEAVE THE PAVEMENT MARKINGS
SCARRED AND WILL NOT CLEARLY REMOVE THE MARKINGS
 - PLACE NEW THERMOPLASTIC PAVEMENT MARKINGS
 - COST APPROX. \$5,000 - BY OPERATIONS
 - TIME TO COMPLETE - 3 DAYS
 - RESURFACING COMPLETED 2 YEARS AGO

REVISIONS			
NO.	DATE	DESCRIPTION	APPROVED


PREPARED BY:

TECHNICAL SERVICES
DIVISION



ENGINEERING & OPERATIONS
DEPARTMENT
601 E. KENNEDY BLVD., TAMPA, FLORIDA 33602
P.O. BOX 1110, TAMPA FLORIDA 33601
(813) 272-5912

NAME	DATE
DESIGNED BY: MIKE FLICK, P.E.	07/19
DRAWN BY: MIKE MCCLELLAND	07/19
CHECKED BY: MIKE FLICK, P.E.	07/19
SUPERVISED BY: MICHAEL B. FLICK, P.E.	

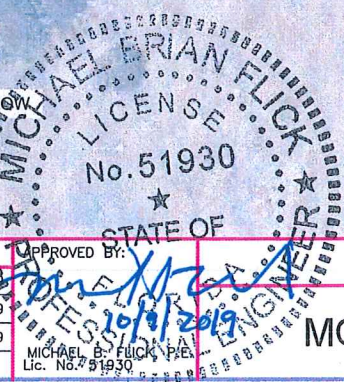

OPTION 1

MORRIS BRIDGE ROAD

PROJECT NO.	SHEET NO.
N/A	